


Skid Sprayer with Remote Reel

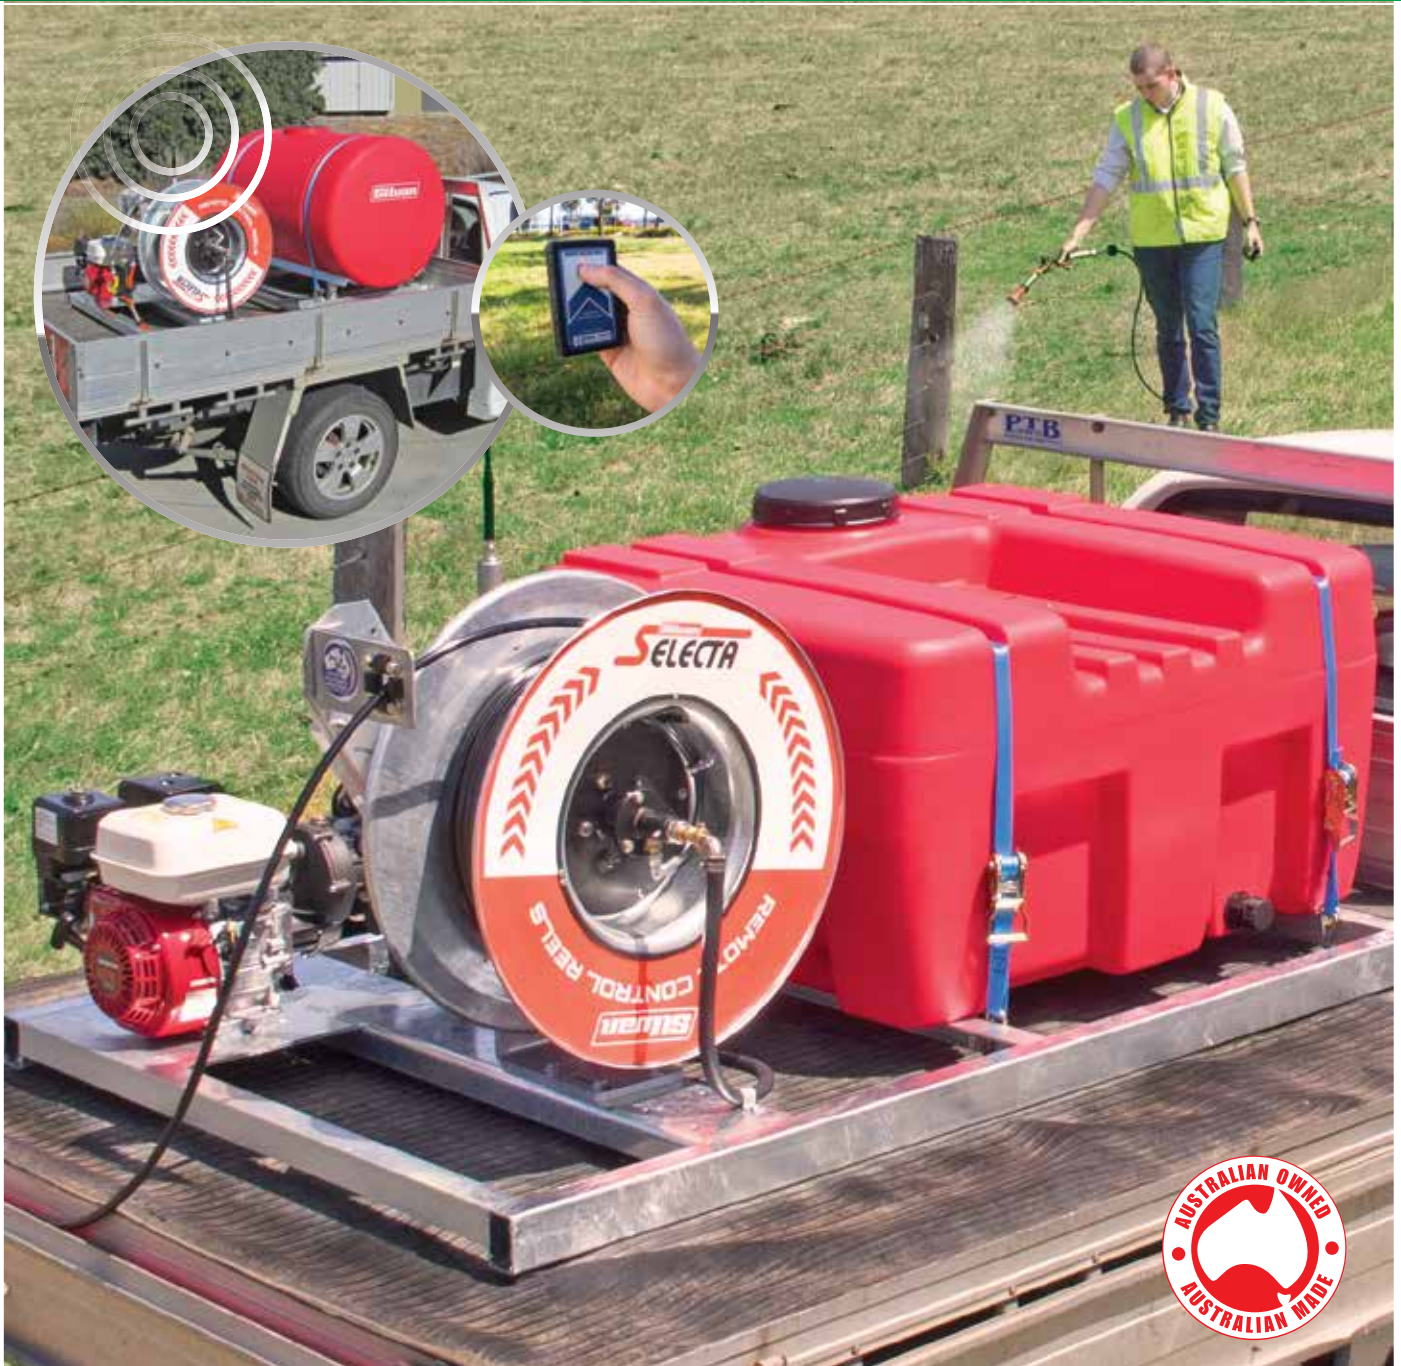

MODEL SPECIFICATIONS

PUMP	Engine driven Comet BP60/20 diaphragm pump with pressure regulator (58L/min open flow, 2000kpa max pressure).	FILTRATION	Lid strainer and suction line strainer.
TANK	400/600L Polytuff impact resistant polyethylene construction with internal sump.	HOSEREEL	Australian made REEL TUFF Remote hose reel. Galvanised steel construction for enhanced durability, direct drive gearbox, long range interference-free remote control, hub position lock with spring loaded mechanism.
FRAME	Steel skid frame, hot dipped galvanised skid for extra durability and superior corrosion resistance.	HOSE	100m of 1/2" O.D hose with kink resistant nylon tubing.
PRESSURE GAUGE	0-25 Bar dual stage glycerine filled gauge.	SPRAYGUN	Turbo 400 spray gun and liquid shutoff snap coupling for easy removal, storage or change.

MODEL DESCRIPTION

MODEL DESCRIPTION	CODE
400L SKID SPRAYER WITH REEL TUFF REMOTE REEL	L04H4-38R147
600L SKID SPRAYER WITH REEL TUFF REMOTE REEL	L06H4-38R147

Note: Not all options will fit all models. Extra charges may apply to fitment of some options.