

Linkage P50E Turbomiser




Vineyards



Orchards



Greenhouse

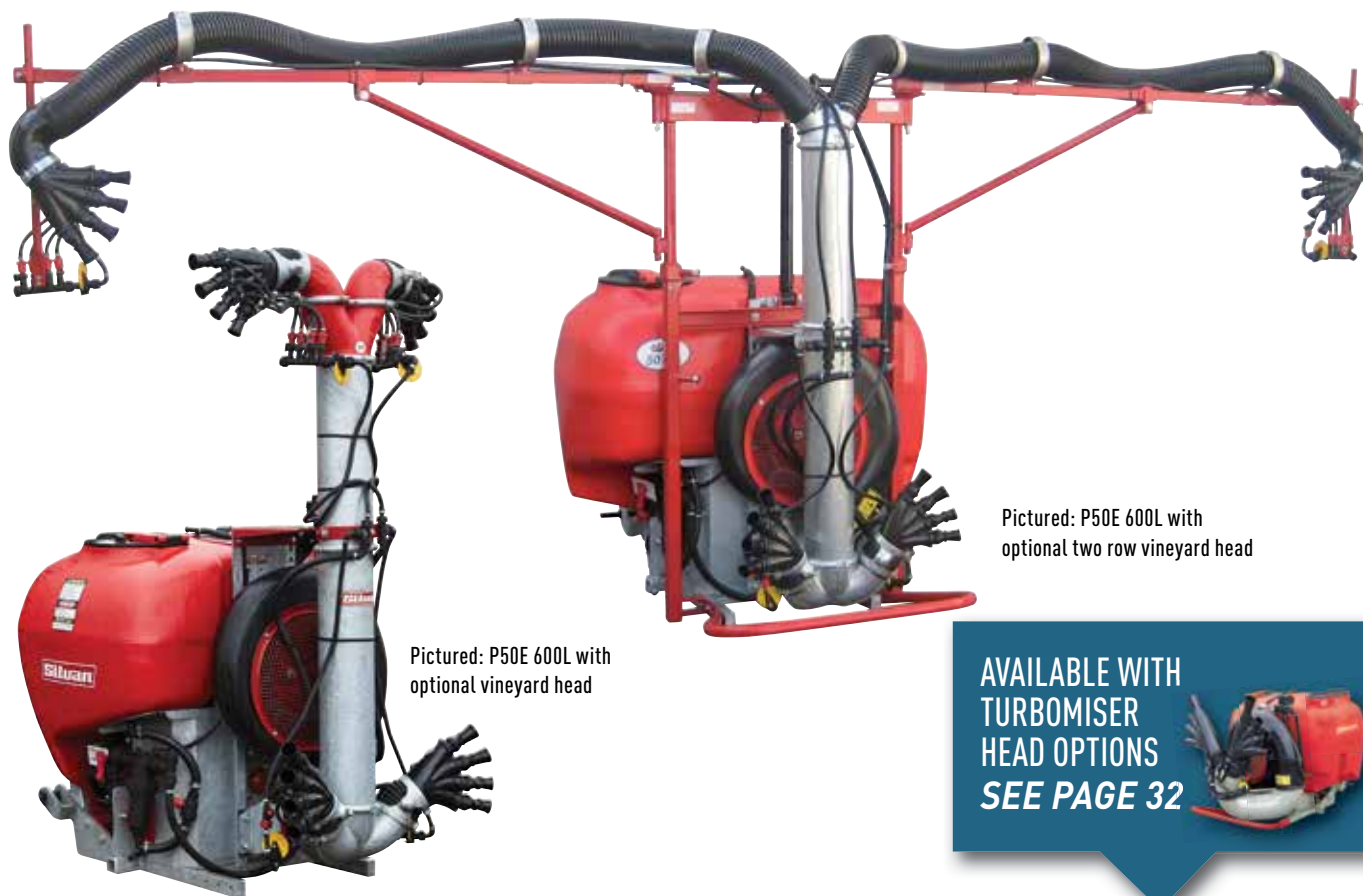

Pictured: P50E 600L with optional vineyard head

Pictured: P50E 600L with optional two row vineyard head

AVAILABLE WITH
TURBOMISER
HEAD OPTIONS
SEE PAGE 32



MODEL SPECIFICATIONS

PUMP	CD32 centrifugal pump, 140L/min. constructed from toughened nylon. Stainless steel shaft & viton/ceramic seal.	TANK	Polytuff impact resistant polyethylene construction, calibrated sight line, non-spill lids, hydro chemical mixer in larger basket, lids with basket strainers, separate in-built 18L fresh water hand wash tank.			
FAN SIZE	P50E: 500mm dia. turbine fan, 4000 rpm. Power consumed 40 kw / 55HP.	FRAME	Galvanised RHS steel construction, cat II linkage.			
NOZZLES	Air shear.	AGITATION	Bypass and pneumatic.			
GEARBOX	Multiplication type through multi-grip, multi-vee belt and pulley, over-run free wheeling hub and oil bath housing.	FILTRATION	Lid strainer and suction line strainer.			
CONTROLS	Two sided electric on/off control with control box mounted in cabin. Rotary plate distribution regulators with 15 settings and manual pressure adjustment.	PTO DRIVESHAFT	Quality Bondioli & Pavesi driveshaft with quick release pins & safety cover.			
PRESSURE GAUGE	Protected 100mm glycerine gauge fitted at front of sprayer.	HP REQUIRED	Minimum 55 PTO HP.			
		DIMENSIONS GTM-P50N (LESS HEAD)	L (MM)	W (MM)	H (MM)	KG (DRY)
			1100	1450	1150	220

MODEL DESCRIPTION

600L P50E LINKAGE TURBOMISER: P50E Fan (spray head not included)

CODE

GTM-P50N

FACTORY OPTIONS

Vineyard head - 4 heads (4 x 4)

CODE

GT55-11

Two row vineyard head

GT50-TCF2M2M

Super Cannon head

GT55-1

Manual turntable for Super Cannon

GT55-4

Hydraulic turntable for Super Cannon

GT55-9

Bravo 180S automatic rate controller

GT-24

Note: Not all options will fit all models. Extra charges may apply to fitment of some options. Sprayer depicted with optional sprayhead.